

Southern Cross Windows
commercial
Bi-fold Doors

The indoor answer to outdoor living...



SOUTHERN CROSS
WINDOWS

Your one **Stop Shop**

commercial Bi-fold Doors

Performance Parameters


Features and Benefits

- Ability to swing in, swing out, stack to one side or both sides
- Concealed locking system for a clean, contemporary look
- Access panel has a 4 point locking system for superior security
- Unique roller adjustment feature for smooth, trouble free operation
- Single entry door access available

Frame size	100mm
Maximum door height	3100mm
Maximum door width	8000mm
Maximum panel width	1000mm
Maximum panel weight	90kgs
Maximum water rating	300Pa
Maximum wind rating	6000 Pa ULS
Maximum glass thickness	13.52mm (single glazed) 26mm (IGUs)
Maximum bushfire attack level	BAL 40*

* As per the deem to satisfy provisions outlined in AS3959

Your one **Stop Shop**

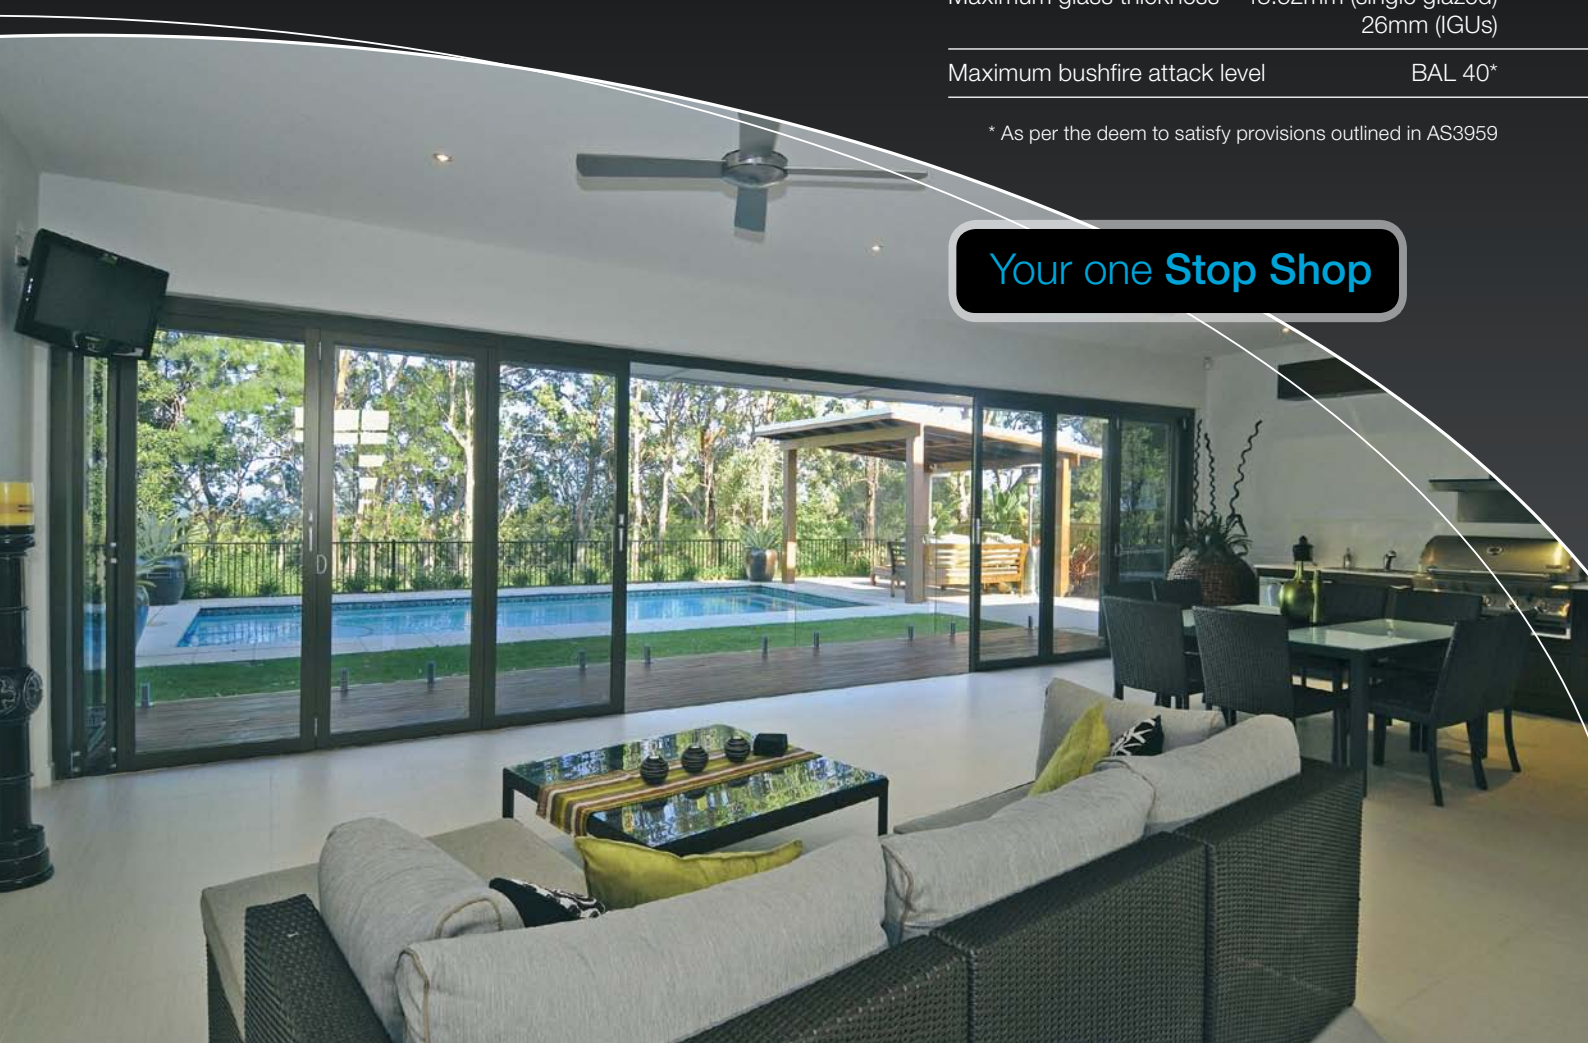

windows | doors | insect & safety screens | showerscreens | mirrors & wardrobes



Australian
Owned & Made

Southern Cross Glass products are proudly made in Australia and designed specifically to meet all Australian conditions

Note: Products may be subject to local variation, regulatory requirements and confirmation of structural performance. Screening not available in selected configurations.



**SOUTHERN CROSS
WINDOWS**

For more information call Southern Cross Windows on
0755 343 300 OR 1300 496 061
or visit southerncrosswindows.com.au

Southern Cross Windows Nov 2015